

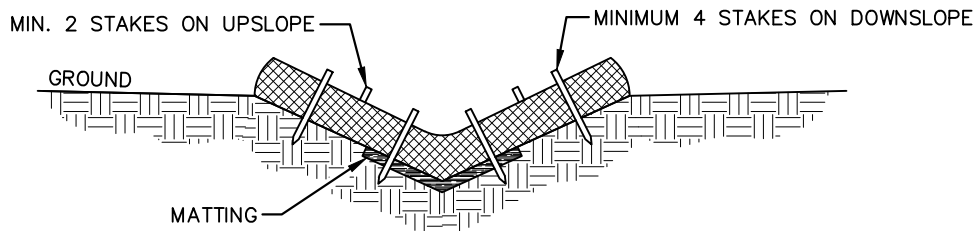


PLAN VIEW

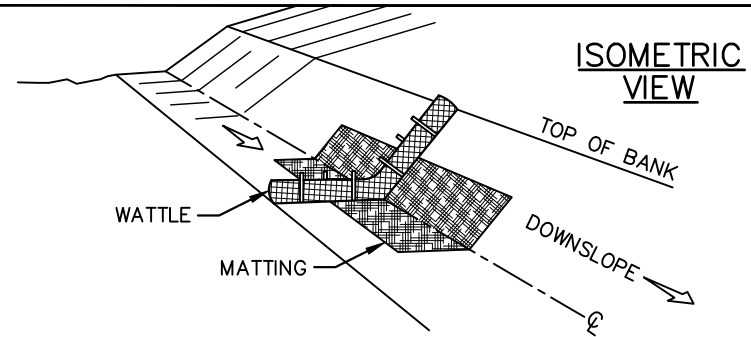


V-DITCH SECTION VIEW

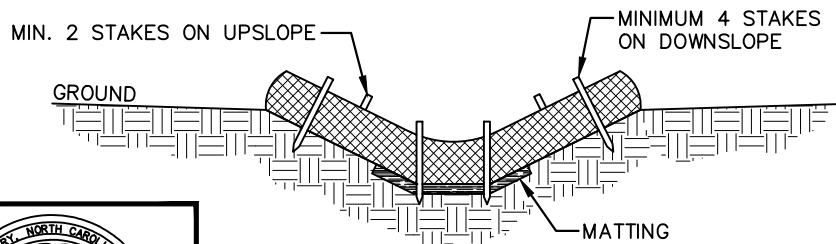



TRAPEZOIDAL DITCH SECTION VIEW

- NOTES:**
- 1) USE A MINIMUM 12 INCH DIAMETER EXCELSIOR WATTLE.
 - 2) USE 24 INCH LONG WOODEN STAKES WITH A 2"x2" NOMINAL CROSS SECTION.
 - 4) INSTALL WATTLE(S) TO A HEIGHT ON SLOPE SO FLOW WILL NOT WASH AROUND WATTLE AND SCOUR SLOPES, OR AS DIRECTED.
 - 5) INSTALL A MINIMUM OF TWO UPSLOPE STAKES AND FOUR DOWNSLOPE STAKES AT AN ANGLE TO WEDGE WATTLE TO GROUND AT BOTTOM.
 - 6) PROVIDE STAPLES MADE OF 0.125 INCH DIAMETER STEEL WIRE FORMED INTO A U-SHAPE NOT LESS THAN 12 INCHES IN LENGTH.
 - 7) INSTALL STAPLES APPROXIMATELY EVERY 1 LINEAR FOOT ON BOTH SIDES OF WATTLE AND AT EACH END TO SECURE IT TO THE SOIL.
 - 8) AFTER INSTALLATION OF STAPLES, CHINK ANY GAPS BETWEEN WATTLE AND GROUND WITH MATTING.

WEAVE STAPLES THROUGH MESH CASING OF WATTLE



STAPLE INSTALLMENT SECTIONS

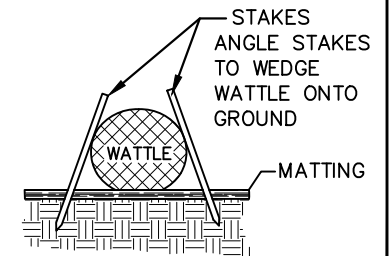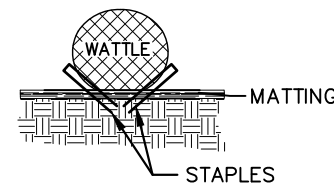

STAKE INSTALLMENT CROSS SECTION



EFFECTIVE: 07/01/21

WATTLE

DETAIL No.

4000.06
SHEET 2 OF 2