
## NOTES:

- 1. SKIMMER IS TO BE A SURFACE DEWATERING DEVICE SUCH AS BMP SKIMMER OR APPROVED DEVICE.
- 2. SKIMMER SHOULD RISE TO LEVEL OF WEIR HEIGHT IN TEMPORARY BASIN OR TO RISER INLET.
- 3. ROPE ATTACHED TO SKIMMER TO HELP KEEP CLEAN.
- 4. SIZING OF ORIFICE TO ALLOW FOR DEWATERING TIME OF 24-72 HOURS.

RIGID FLEXIBLE JOINT -



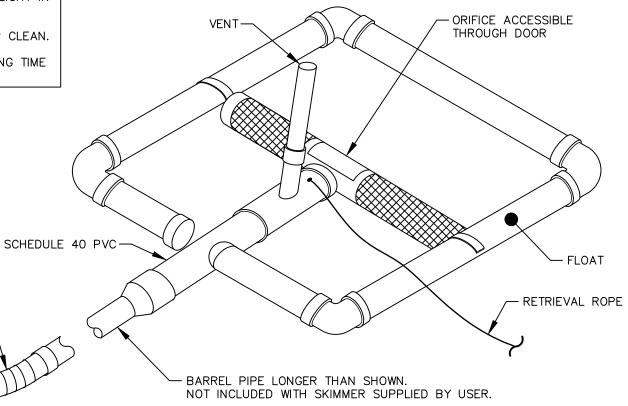

OUTLET END: CONNECTION TO OUTLET PIPE OR RISER-

DETAIL No.