


CONCRETE SLAB

STANDARD MANHOLE RING AND COVER (PER DETAIL 7000.07) MAY BE CAST IN SLAB OR SECURED TO TOP OVER STEPS


NOTES:

1. EITHER SOLID BRICK, SOLID BLOCK, OR PRECAST CONCRETE MAY BE USED.
2. TOP AND BOTTOM STEPS REQUIRED.
3. USE MINIMUM 3,000 P.S.I. CONCRETE MIX FOR SLABS.
4. INSIDE DIMENSION FOR 24 INCH PIPE AND GREATER USE PIPE DIAMETER PLUS 12 INCHES.
5. WHERE DEPTH EXCEEDS 3 FEET, MANHOLE RING AND COVER TO BE LOCATED OVER STEPS.
6. LETTERING FOR MANHOLE COVER PER DETAIL 7000.07.

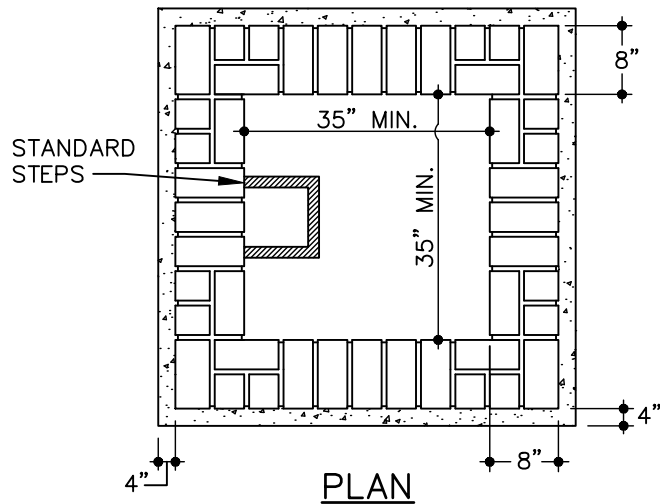


PLAN

STANDARD STEPS

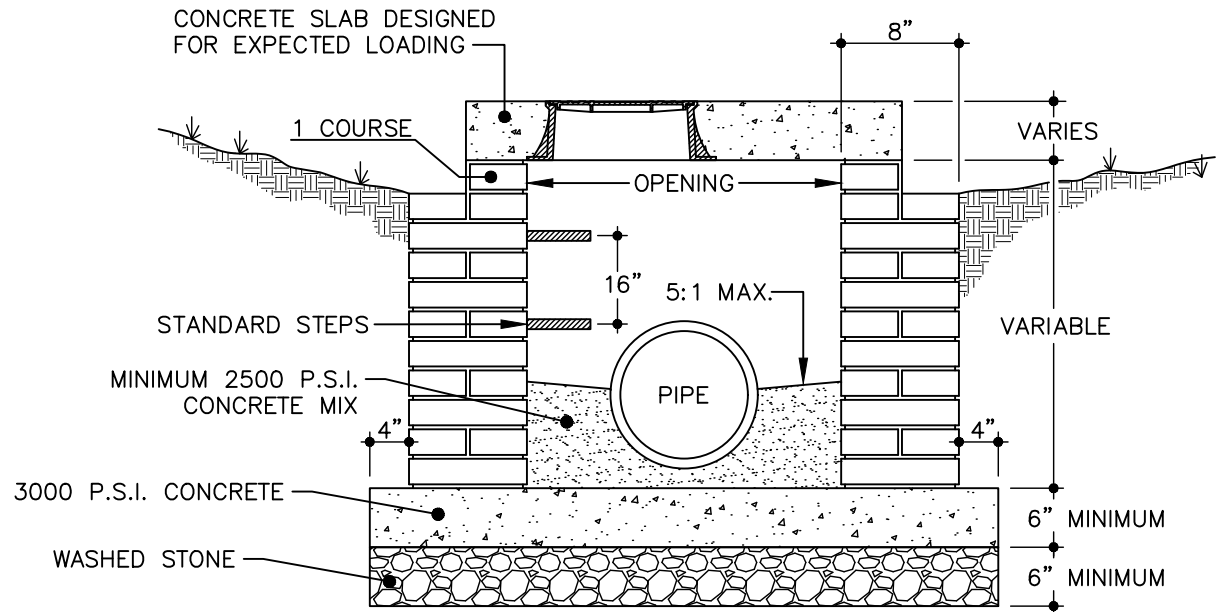

SECTION



EFFECTIVE: 07/01/21

STANDARD YARD INLET WITH CONCRETE SLAB

DETAIL No.

8000.01