



SECTION VIEW

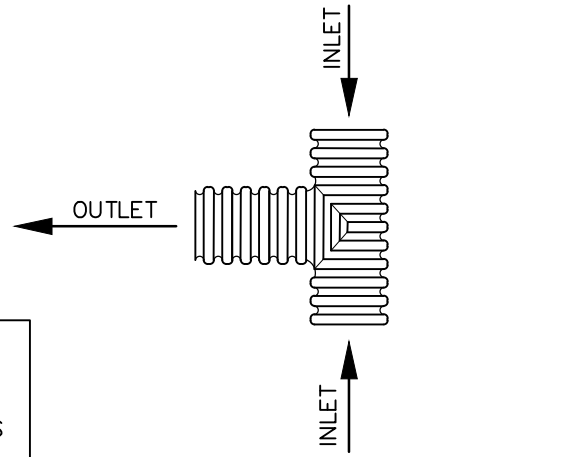

T-SECTION PLAN VIEW

- NOTES:**
1. TEMPORARY DIVERSION: GENERALLY, USE AN EARTHEN DIVERSION TO DIRECT SURFACE RUNOFF INTO THE TEMPORARY SLOPE DRAIN. MAKE THE HEIGHT OF THE RIDGE OVER THE DRAIN CONDUIT A MINIMUM OF 1.5 FEET AND AT LEAST 6 INCHES HIGHER THAN THE ADJOINING RIDGE ON EITHER SIDE. THE LOWEST POINT OF THE DIVERSION RIDGE SHOULD BE A MINIMUM OF 1 FOOT ABOVE THE TOP OF THE DRAIN SO THAT DESIGN FLOW CAN FREELY ENTER THE PIPE.
 2. OUTLET PROTECTION: PROTECT THE OUTLET OF THE SLOPE DRAIN FROM EROSION.
 3. MINIMUM OF 10 INCH PIPE OR GREATER BASED ON AREA OF DRAINAGE.

STANDARD TEMPORARY SLOPE DRAIN



EFFECTIVE: 07/01/22

DETAIL No.
4000.24