

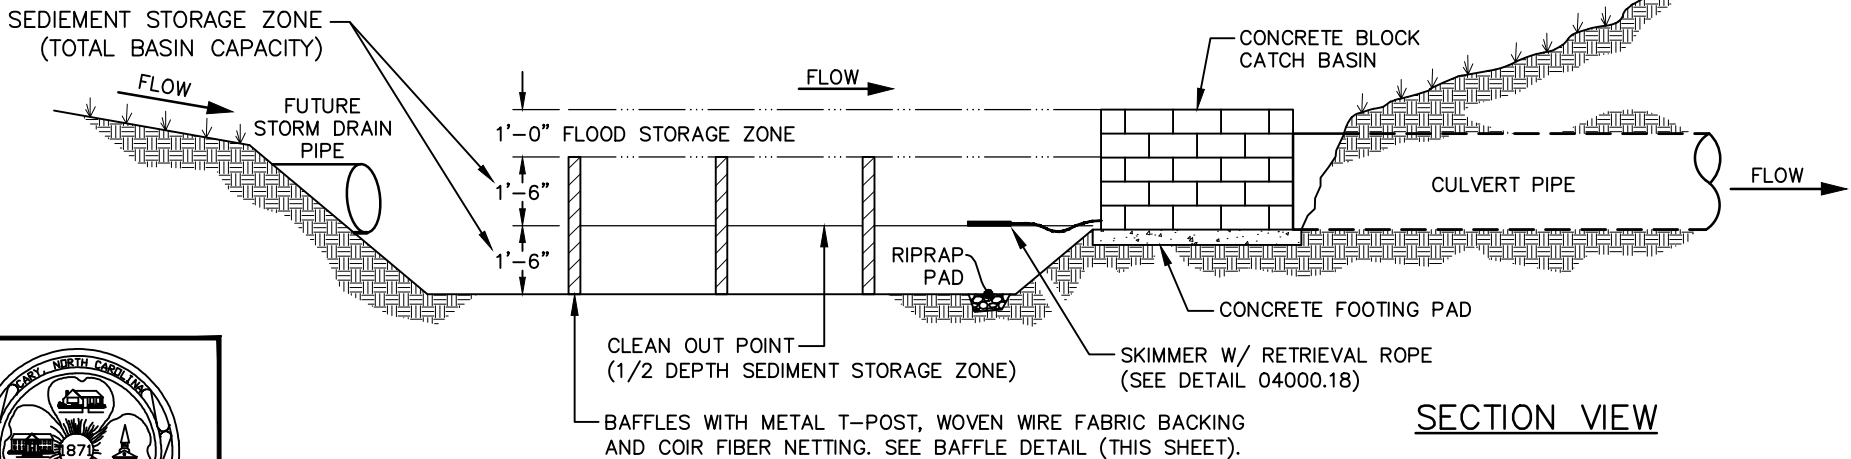


- MAINTENANCE:**
1. INSPECT TEMPORARY BASIN AT LEAST WEEKLY AND AFTER EACH RAINFALL. MAKE NEEDED REPAIRS IMMEDIATELY.
  2. REMOVE SEDIMENT WHEN 1/2 FULL AND RESTORE THE BASIN TO ITS ORIGINAL DIMENSIONS.
  3. REMOVE ALL TRASH AND OTHER DEBRIS.

- NOTES:**
1. AT END OF PROJECT, CATCH BASIN CAN BE RAISED AS NEEDED PLUGGING OPEN COURSE OF BLOCK WITH MORTAR.
  2. RISER CAN BE BUILT AS A STANDARD CATCH BASIN/JUNCTION BOX (WITH SKIMMER ATTACHMENT) IN RECEIVING WALL AND BE UTILIZED AS SUCH WHEN PROJECT IS STABLE.

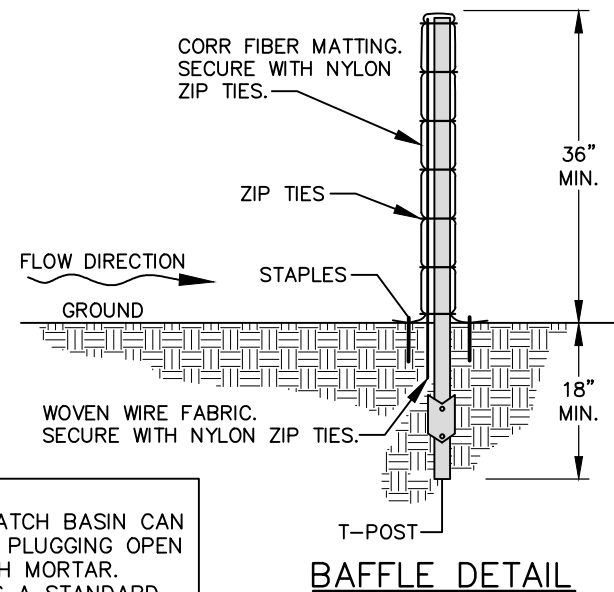

EFFECTIVE: 07/01/23

**CATCH BASIN RISER/FILTER**

DETAIL No.

4000.05