


PERSPECTIVE VIEW

MAINTENANCE:

1. INSPECT WEEKLY AND AFTER EACH RAINFALL. MAKE NEEDED REPAIRS IMMEDIATELY.
2. REMOVE SEDIMENT AS NECESSARY TO PROVIDE ADEQUATE STORAGE VOLUME FOR NEXT RAIN EVENT.
3. REPLACE STONE AS NEEDED.

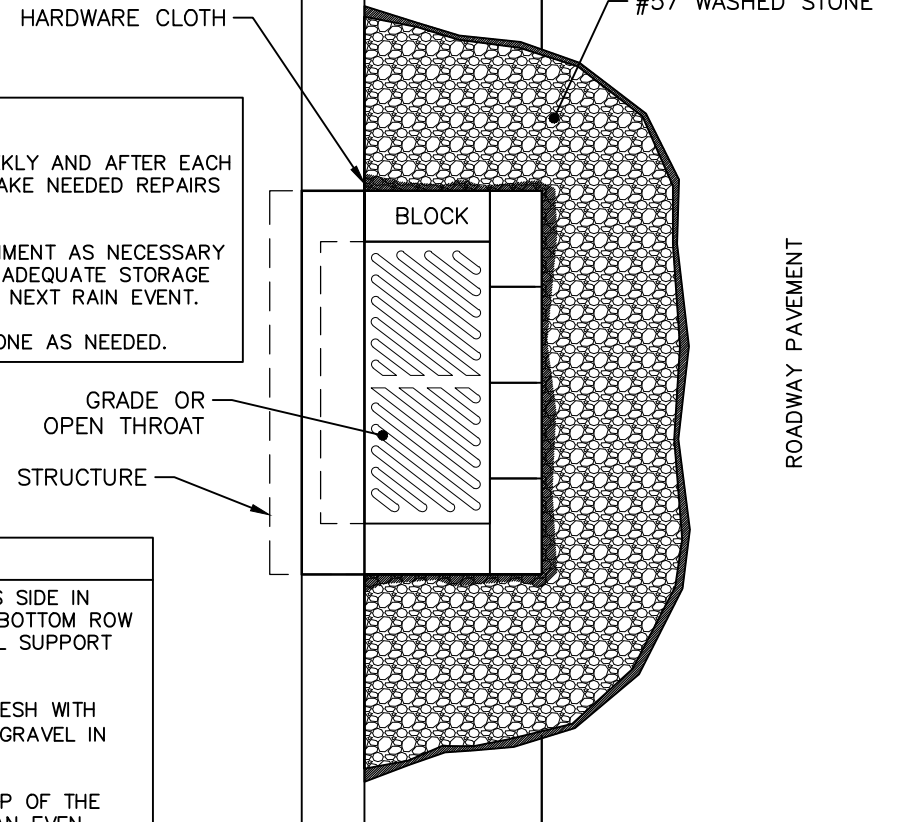


PLAN VIEW

CONSTRUCTION SPECIFICATIONS

1. LAY ONE BLOCK ON EACH SIDE OF THE STRUCTURE ON ITS SIDE IN THE BOTTOM ROW TO ALLOW POOL DRAINAGE. PLACE THE BOTTOM ROW OF BLOCKS AGAINST THE EDGE OF THE CURB FOR LATERAL SUPPORT AND TO AVOID WASHOUTS WHEN OVERFLOW OCCURS.
2. CAREFULLY FIT HARDWARE CLOTH OR COMPARABLE WIRE MESH WITH 1/2 INCH OPENINGS OVER ALL BLOCK OPENINGS TO HOLD GRAVEL IN PLACE.
3. USE #57 WASHED STONE PLACED 2 INCHES BELOW THE TOP OF THE BLOCK ON A 2:1 SLOPE OR FLATTER AND SMOOTH IT TO AN EVEN GRADE.
4. APPROVED EQUIVALENTS ACCEPTED.

NTS

STANDARD BLOCK & GRAVEL PROTECTION



EFFECTIVE: 07/01/24

DETAIL No.

4000.13