


PLAN VIEW


USE SOLID BRICK/BLOCK & MORTAR

PIPE DIAMETER	MINIMUM WALL THICKNESS
8" - 12"	4"
16" OR GREATER	8"

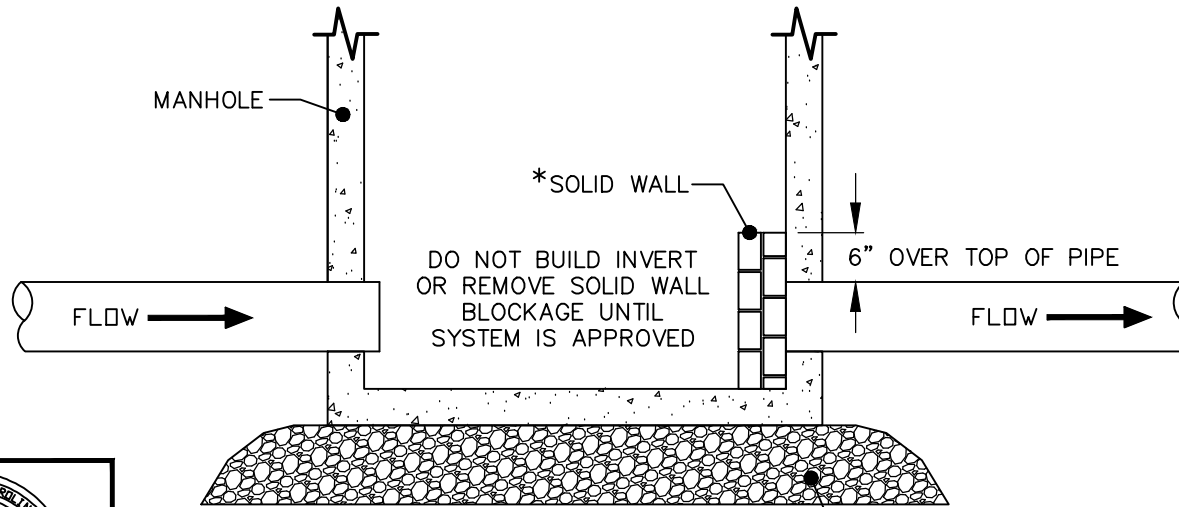

SECTION VIEW

\*LOCATED IN FIRST MANHOLE FROM TIE-IN. SOLID WALL MUST BE BUILT BEFORE LAYING NEXT RUN OF PIPE.



SANITARY SEWER PROTECTION DURING CONSTRUCTION

EFFECTIVE: 07/01/24

DETAIL No.

7000.29