



CONCRETE SLAB

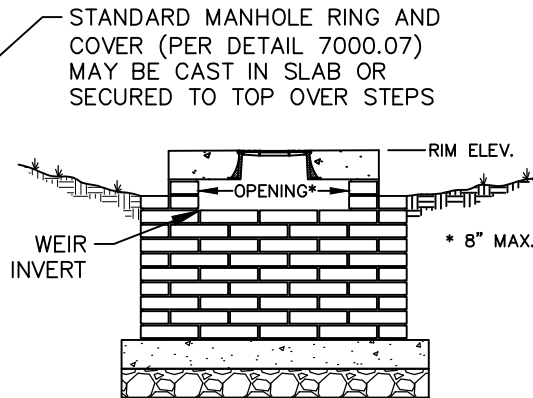


SECTION B-B

**NOTES:**

1. EITHER SOLID BRICK, SOLID BLOCK, OR PRECAST CONCRETE MAY BE USED.
2. ONLY TOP AND BOTTOM STEPS REQUIRED ON BOXES INSTALLED IN THE PUBLIC RIGHT-OF-WAY.
3. USE MINIMUM 3,000 P.S.I. CONCRETE MIX FOR SLABS.
4. INSIDE DIMENSION FOR 24 INCH PIPE AND GREATER USE PIPE DIAMETER PLUS 12 INCHES.
5. WHERE DEPTH EXCEEDS 3 FEET, MANHOLE RING AND COVER TO BE LOCATED OVER STEPS.
6. LETTERING FOR MANHOLE COVER PER DETAIL 7000.07.
7. PLACE SAND BAG FILLED WITH #57 STONE OVER WEEP HOLES ON EXTERIOR OF BOX DURING CONSTRUCTION
8. NUMBER OF OPENINGS TO BE DETERMINED BY ENGINEER - VARIES (1-4).

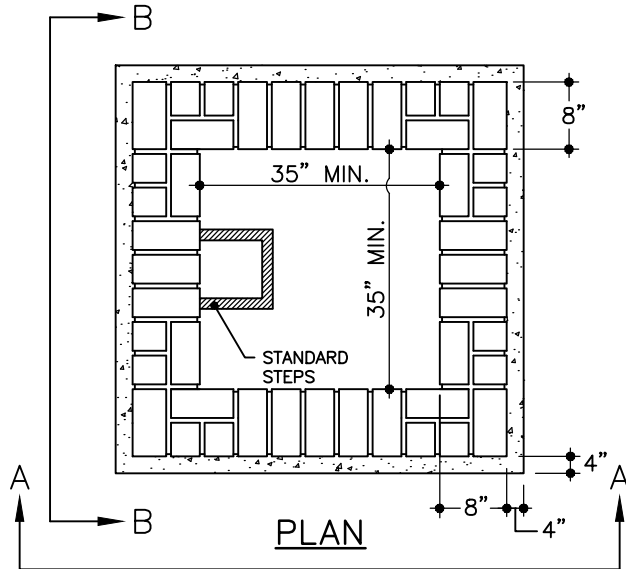

PLAN

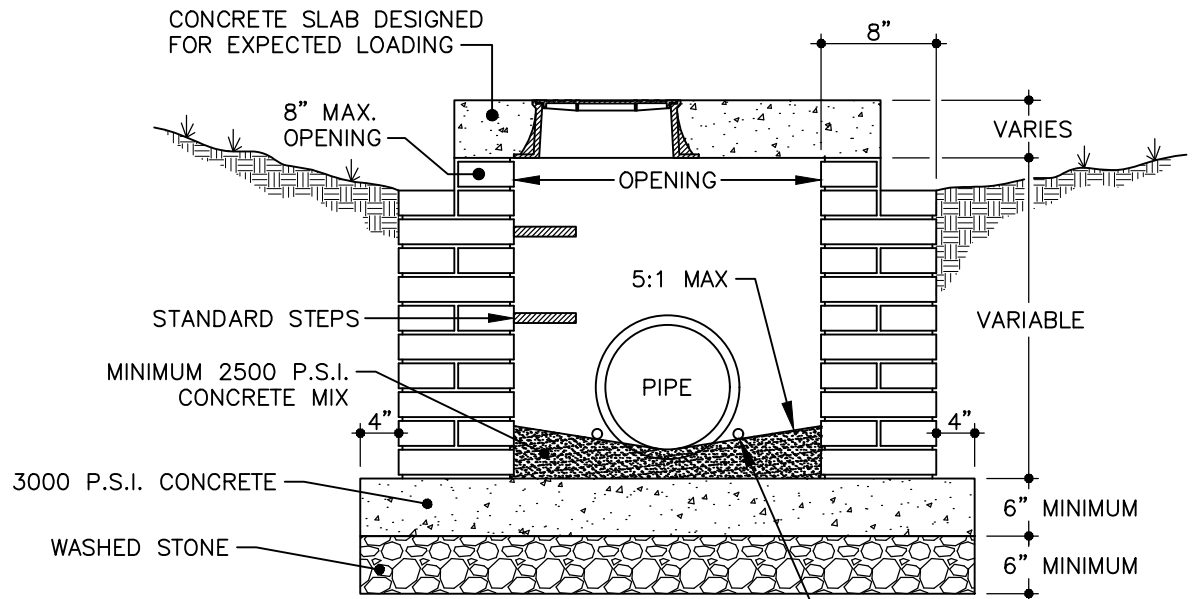

SECTION A-A

2" WEEP HOLE (TYP.) ON UPSLOPE BOX FACE ONLY



NTS

**STANDARD YARD INLET WITH CONCRETE SLAB**

DETAIL No.

8000.01

EFFECTIVE: 07/01/24