


TYPICAL SECTION


5'-0" MIN.

PLAN VIEW

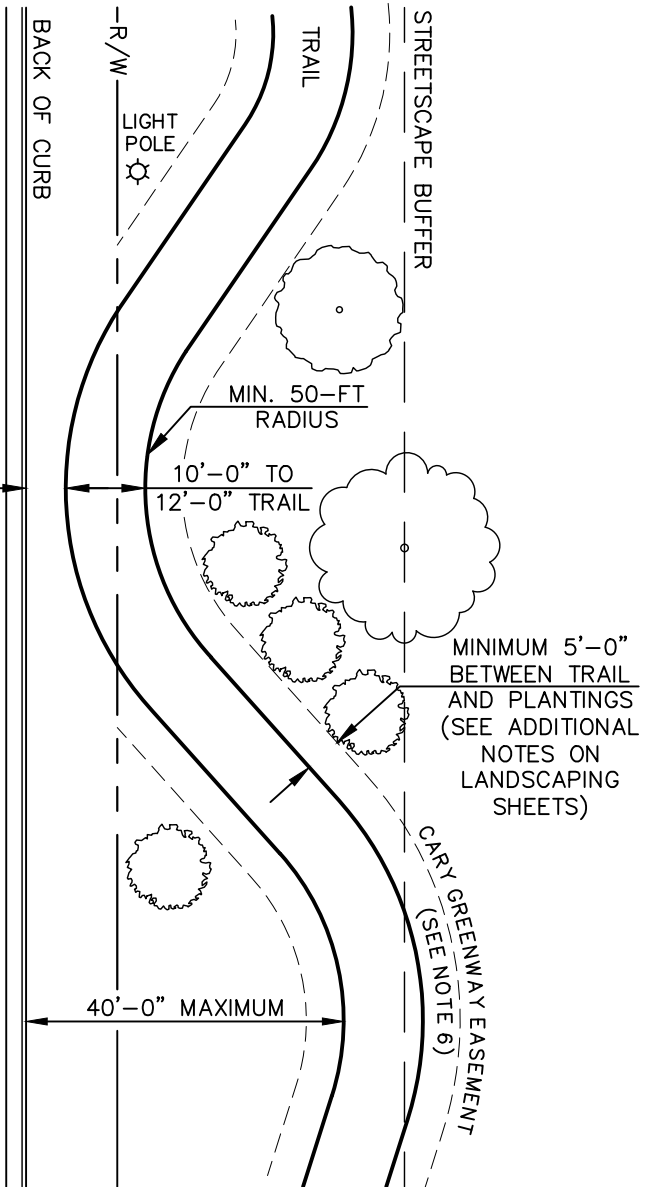

NOTES:

1. **GREENWAY TRAIL SHALL BE CONSTRUCTED AT WIDTH INDICATED ON SITE LAYOUT & GRADING SHEETS.**
2. TRAILS GREATER THAN 10 FEET WIDE SHALL HAVE 2 FOOT WIDE SHOULDERS, UNLESS SPECIFIED OTHERWISE ON THE SITE LAYOUT & GRADING SHEETS.
3. NO ABOVE GROUND UTILITIES OR UTILITY SURFACE COVERS/PLATES/MANHOLES SHALL BE LOCATED WITHIN TRAIL AND SHALL BE MINIMUM 2 FEET FROM THE EDGE OF TRAIL.
4. TRAILS WILL MEANDER BUT SHALL BE LOCATED MINIMUM 5 FEET FROM THE BACK OF CURB.
5. SIDE SLOPES SHALL NOT EXCEED 3:1. CUT & FILL SLOPES SHALL TIE INTO EXISTING SLOPES TO CREATE AN EVEN TRANSITION.
6. GREENWAY EASEMENTS SHALL BE A MINIMUM 20' WIDE INCLUDING A MINIMUM 5' SHOULDER ON BOTH SIDES OF TRAIL.



EFFECTIVE:07/01/24

STANDARD ASPHALT STREET-SIDE TRAIL

DETAIL No.

9100.02