



PLAN VIEW

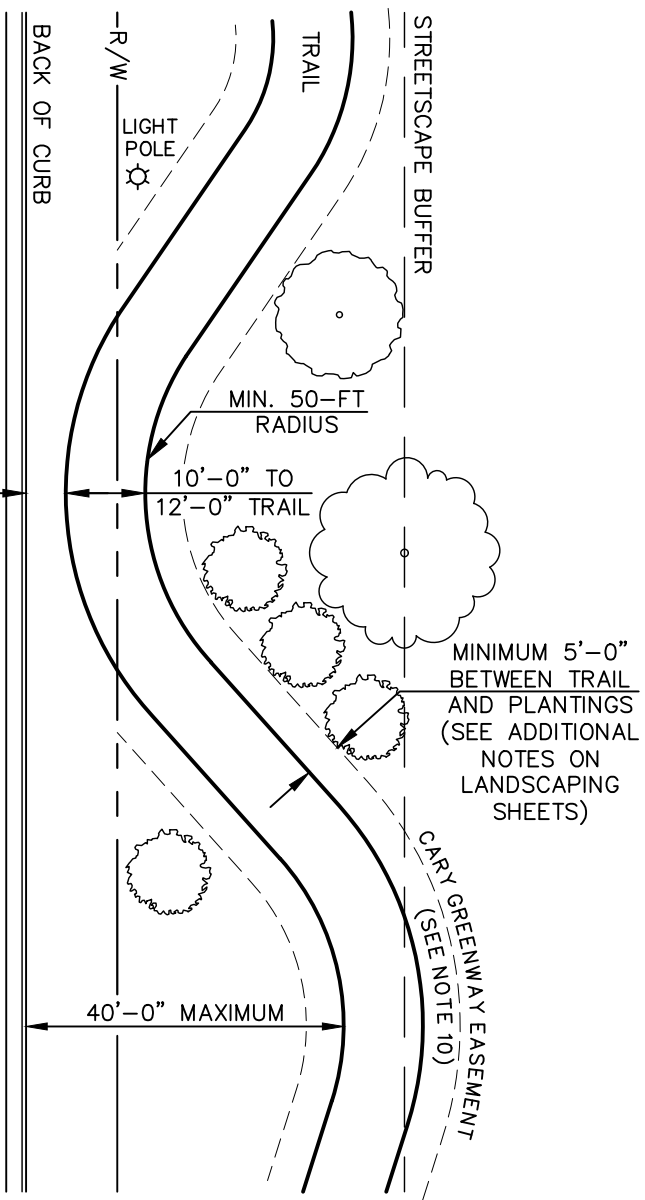

NOTES:

1. GREENWAY TRAIL SHALL BE CONSTRUCTED AT WIDTH INDICATED ON SITE LAYOUT & GRADING SHEETS.
2. TRAILS GREATER THAN 10 FEET WIDE SHALL HAVE 2 FOOT WIDE SHOULDERS, UNLESS SPECIFIED OTHERWISE ON THE SITE LAYOUT & GRADING SHEETS.
3. TRANSVERSE EXPANSION JOINTS TO BE LOCATED AT JUNCTURE WITH STRUCTURES/BRIDGES/BOARDWALKS/UTILITY PLATES AND OTHER DIFFERENT TRAIL MATERIALS.
4. ALL CONCRETE TO BE FINISHED WITH CURING COMPOUND.
5. A 6 INCH DEPTH IS REQUIRED.
6. SAW CUT JOINTS TO WIDTH OF TRAIL. MAX $\frac{1}{8}$ " SAW CUTS.
7. NO ABOVE GROUND UTILITIES OR UTILITY SURFACE COVERS/PLATES/MANHOLES SHALL BE LOCATED WITHIN TRAIL AND SHALL BE MINIMUM 2 FEET FROM THE EDGE OF TRAIL.
8. TRAILS WILL MEANDER BUT SHALL BE LOCATED MINIMUM 5 FEET FROM THE BACK OF CURB.
9. SIDE SLOPES SHALL NOT EXCEED 3:1. CUT & FILL SLOPES SHALL TIE INTO EXISTING SLOPES TO CREATE AN EVEN TRANSITION.
10. GREENWAY EASEMENTS SHALL BE A MINIMUM 20' WIDE INCLUDING A MINIMUM 5' SHOULDER ON BOTH SIDES OF TRAIL.



EFFECTIVE:07/01/24

STANDARD CONCRETE STREET-SIDE TRAIL

DETAIL No.

9100.03