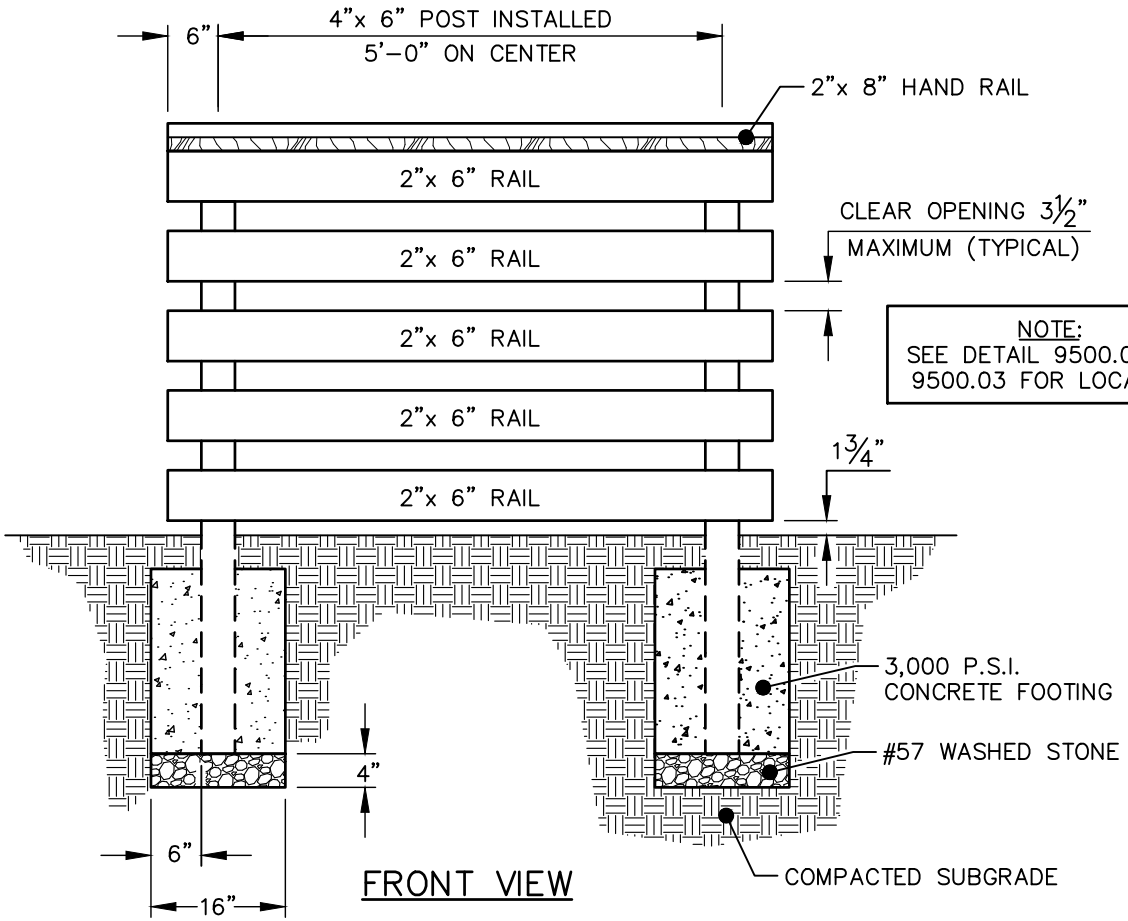

FRONT VIEW

NOTE:
SEE DETAIL 9500.02 OR 9500.03 FOR LOCATION

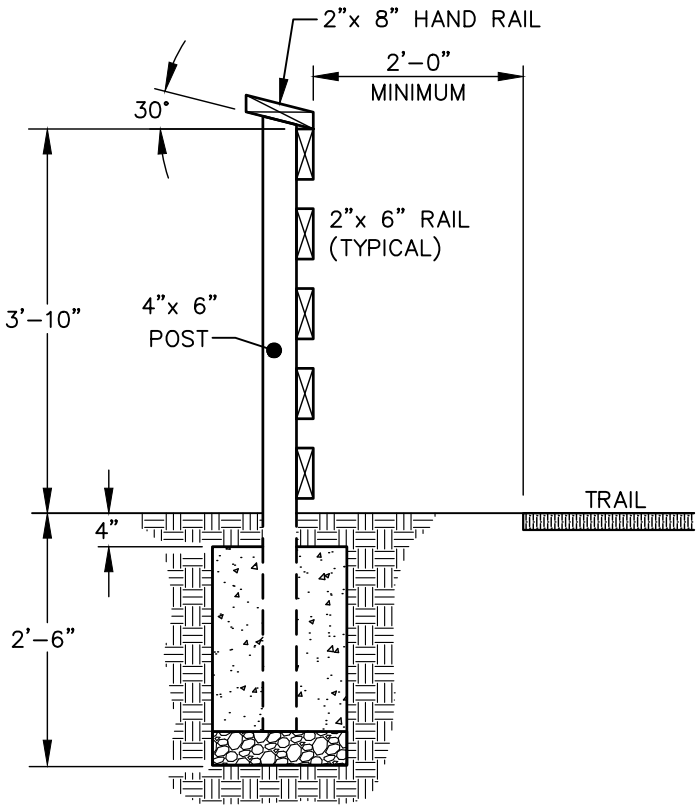

SECTION VIEW

NOTES:
1. PRESSURE TREATED No. 1 SOUTHERN PINE.
2. ALL BOLTS SHALL BE RECESSED. USE GALVANIZED 5/16" LAG BOLTS FOR 2"x6" TO 4"x6" CONNECTIONS, AND 1/4" GALVANIZED LAG BOLTS FOR ALL OTHERS.
3. STAIN WITH ONE COAT OF TWP CALIFORNIA CEDAR.
4. MINIMUM 2 FEET CLEAR BETWEEN RAILING & TRAIL EDGE.

EFFECTIVE:07/01/24

STANDARD STEEL BEAM & WOOD (OPTION B) BRIDGE RAILING EXTENSION

DETAIL No.
9500.04