



NOTES:

1. PIPE SHALL BE BEDDED IN NO. 57 STONE TO CENTER OF PIPE AND EXTEND 6 INCHES BELOW THE PIPE.
2. FILTER FABRIC SHALL BE PLACED AS SHOWN IN DETAILS BELOW.
3. THE CONTRACTOR SHALL BE RESPONSIBLE FOR VERIFYING COMPACTION REQUIREMENTS BY SOILS TESTING CERTIFIED BY A LICENSED PROFESSIONAL GEOTECHNICAL ENGINEER.

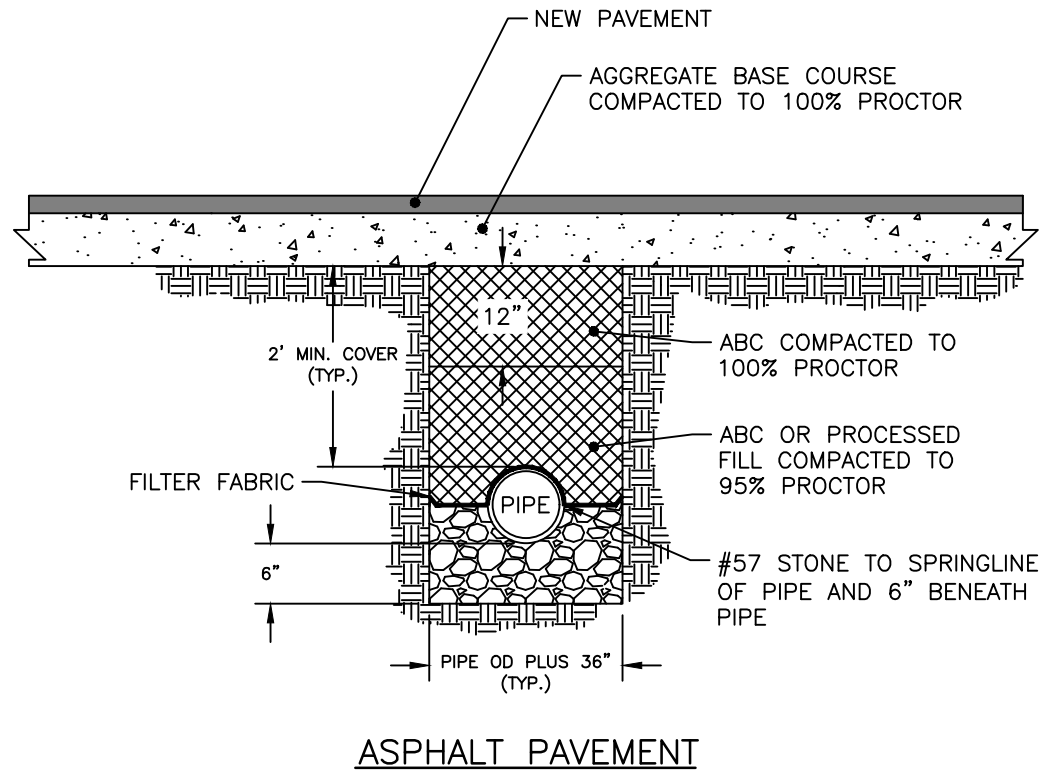

EFFECTIVE: 07/01/21

NEW DEVELOPMENT STORMWATER TRENCH INSTALLATION

DETAIL No.

5000.06